

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

### SPFCIFICATIONS

Current Rating:

3.0 Amp

Insulator Resistance:

5000 Megohms min.

Contact Resistance:

20 m ohms max.

Dielectric withstanding:

AC 1000V/minute

Operating Temperature:

-40°C to +105°C

Contact Material:

Brass

Insulator Material:

High Temperature Thermoplastic

+Glass Fibre UL94V-0

Color: Black

Finish:

Gold, Tin or Duplex plated

Standard: Gold flash all over



Duplex plating:

Gold plated on contact area



Tin on solder area

**RoHS Compliance**

Cir-cuits	Dimension (mm)	
	L1	L2
2x3	5.08	15.24
2x4	7.62	17.78
2x5	10.16	20.32
2x6	12.70	22.86
2x7	15.24	25.40
2x8	17.78	27.94
2x10	22.86	33.02
2x12	27.94	38.10
2x13	30.48	40.64
2x15	35.56	45.72
2x17	40.64	50.80
2x20	48.26	58.42
2x25	60.96	71.12
2x30	73.66	83.82
2x32	78.74	88.90

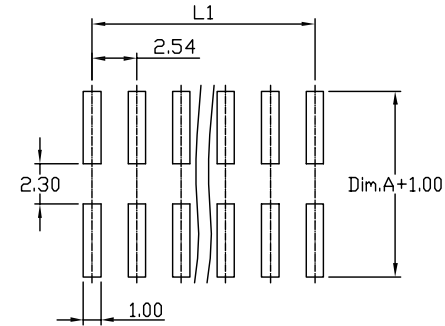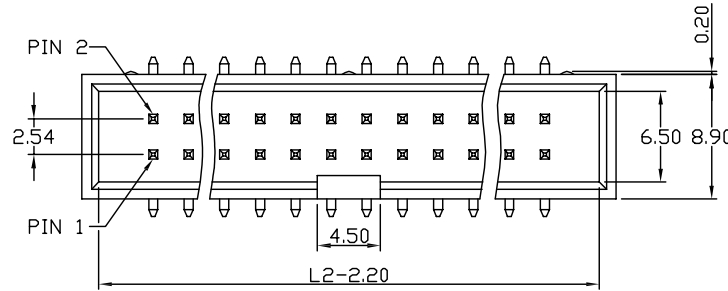

RECOMMENDED P.C.B LAYOUT

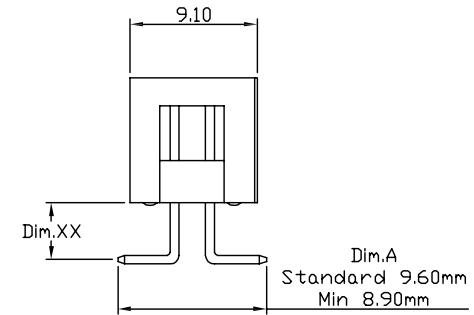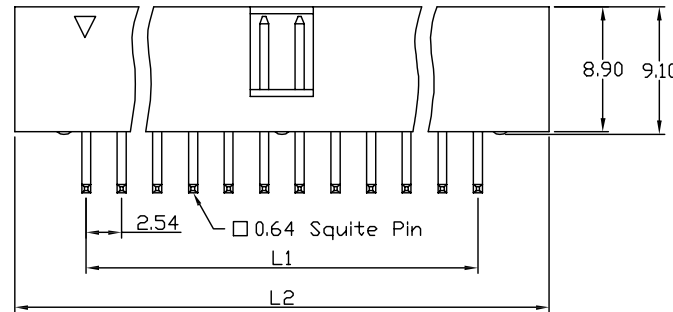


BH N B-26 M XX 2 XX-01G-XX 0 -XX

N: Nylon-6T  
 Color  
 Pitch 2.54  
 SMT Type  
 Square Pin  
 Row of Pin  
 Number of Contact  
 Dim.XX  
 0: Without Post  
 Plastic High 89:8.9  
 G: Gold Plated  
 T: Tin Plated  
 H: Duplex Plated  
 Contact Plating  
 01 Normal  
 03 3u"  
 :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm  
 METRIC  
 .X = ±0.38  
 .XX = ±0.25

DRAW: CHUBBY  
 DATE: 01/10/07  
 CHECK: KEVIN  
 APPROVE: TONY

TITLE: 2.54 Box Header SMT Type Plastic High 8.9  
 MODEL CODE: BHNB-26M642XX-01G-890-10



誠州電子有限公司  
 Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----