





CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPECIFICATIONS



Current Rating: 3.0 Amp
 Insulator Resistance:
 5000 Megohms min.
 Contact Resistance:
 20 m ohms max.
 Dielectric withstanding:
 AC 1000V/minute
 Operating Temperature:
 -40°C to +105°C
 Contact Material: Brass
 Insulator Material:
 PBT
 Color: Black
 Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plating:
 Gold plated on contact area
 Tin on solder area

There are two gaps additional if more than 60 pins



60/64 Pin



06-58 Pin

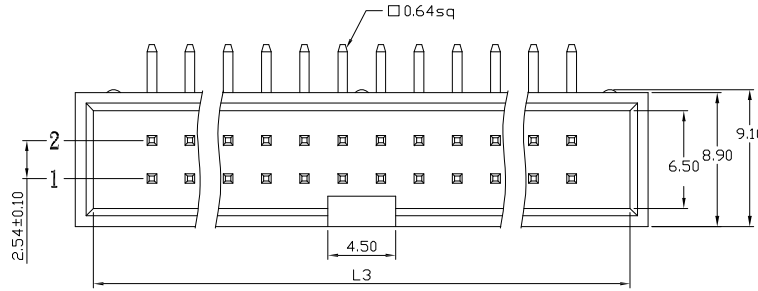

RECOMMENDED P.C.B LAYOUT

Cir-cuits	Dimension (mm)		
	L1	L2	L3
2x3	5.08	15.24	12.84
2x4	7.62	17.78	15.38
2x5	10.16	20.32	17.92
2x6	12.70	22.86	20.46
2x7	15.24	25.40	23.00
2x8	17.78	27.94	25.54
2x9	20.32	30.48	28.08
2x10	22.86	33.02	30.62
2x11	25.40	35.56	33.16
2x12	27.94	38.10	35.70
2x13	30.48	40.64	38.24
2x14	33.02	43.18	40.78
2x15	35.56	45.72	43.32
2x16	38.10	48.26	45.86
2x17	40.64	50.80	48.40
2x18	43.18	53.34	50.94
2x19	45.72	55.88	53.48
2x20	48.26	58.42	56.02
2x21	50.80	60.96	58.56
2x22	53.34	63.50	61.10
2x23	55.88	66.04	63.64
2x24	58.42	68.58	66.18
2x25	60.96	71.12	68.72
2x26	63.50	73.66	71.26
2x27	66.04	76.20	73.80
2x28	68.58	78.74	76.34
2x29	71.12	81.28	78.88
2x30	73.66	83.82	81.42
2x32	78.74	88.90	86.50

RoHS Compliance

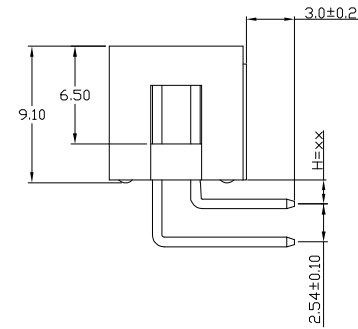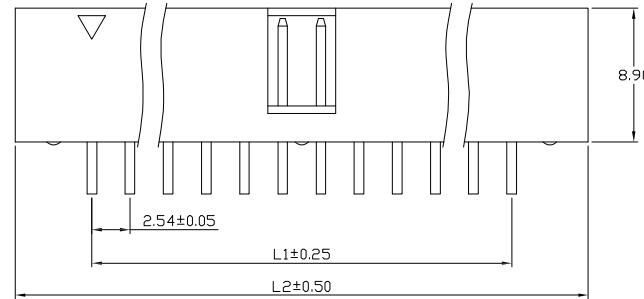

Ordering information:

BH P B-26 R 64 2 XX-XXG-890-XX

P: PBT
 Color
 Pitch 2.54mm
 Right Angle
 Type
 Square Pin
 Row of Pin
 Number of Contact

00=0MM
 10=1.0MM
 Plastic High 15=1.5MM
 89:8.9mm 20=2.0MM
 G: Gold Plated
 T: Tin Plated
 H: Duplex Plated
 Contact Plating
 01 G/F
 03 3u"
 :
 :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm


METRIC

.X = ±0.38
 .XX = ±0.25

DRAW: <i>Chubby</i>	DATE: 01/10/07
CHECK: KEVIN	APPROVE: <i>TONY</i>

TITLE: 2.54mm Box Header Right Angle Type Plastic High 8.9mm

MODEL CODE: BHPB-26R642XX-XXX-890-XX



誠州電子有限公司
 Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----