
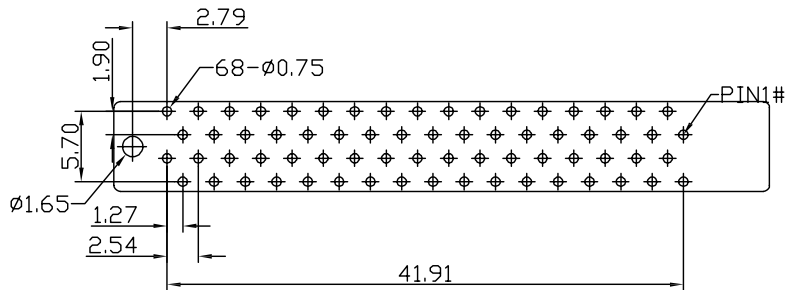

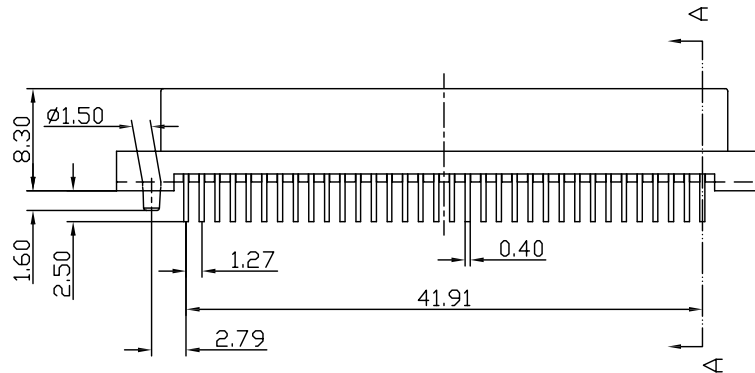


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPFCIFICATIONS

- Current Rating:
1.0 Amp
- Insulator Resistance:
500 Megohms min. (at 500V DC)
- Contact Resistance:
35 Milliohms max.
- Dielectric withstanding:
AC 250V/minute
- Operating Temperature:
-55°C to +105°C
- Contact Material:
Phosphor Bronze
- Insulator Material:
Nylon-66
- Finish:
Gold plated over Nickel on contact area
(Gold flash)
Tin plated on solder tail.

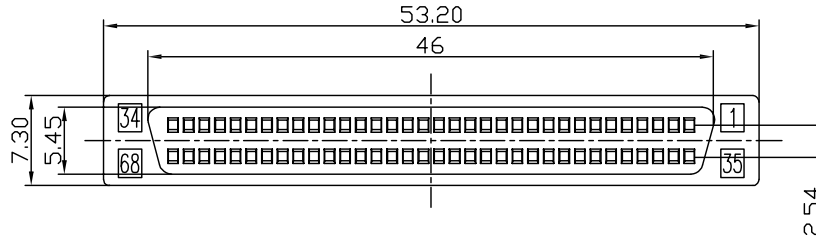

P.C.B LAYOUT

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm METRIC .X = ± 0.38 .XX = ± 0.25	DRAW: CHUBBY	DATE: 12/23/05	TITLE: SCSI II D-SUB Standard Type Strip Form Pin 68P (Without Post)
	CHECK: KEVIN	APPROVE: TONY	MODEL CODE: SCI-212X
			 誠州電子有限公司 <i>Sincere State Electronics Co.,Ltd.</i>

NO	DESCRIPTION	QTY