

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPFCIFICATIONS

Current Rating:
1.0 Amp

Insulator Resistance:
1000 Mohms min at DC 250V

Contact Resistance:
30 m ohms max.

Dielectric withstanding:
AC 500V/minute



Operating Temperature:
-55°C to +105°C

Contact Material:
Phosphor Brass



Insulator Material:
PBT&30% Glass Fiber UL94V-0

Color: Black

Finish:
Tin plated over Nickel

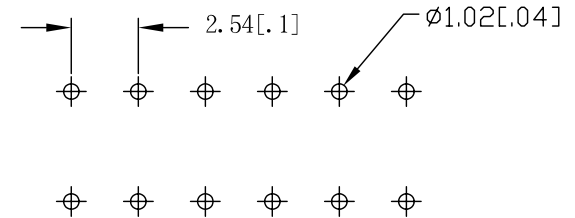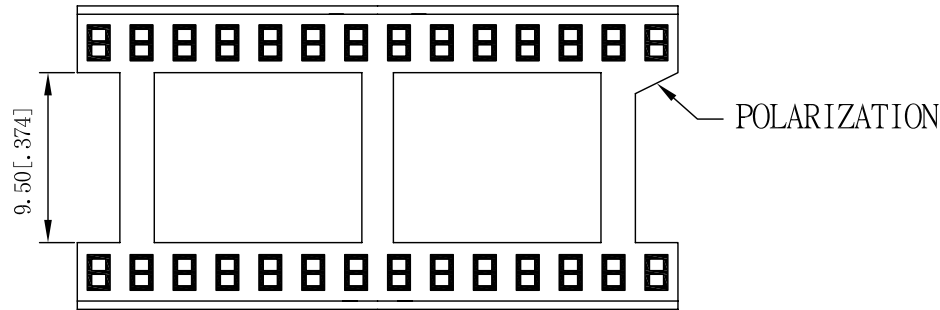

RECOMMENDED P.C.B LAYOUT

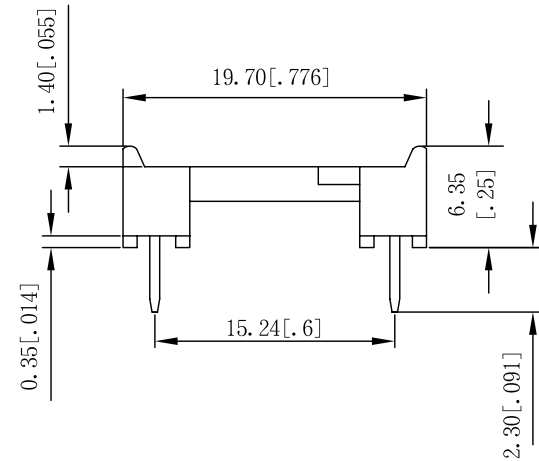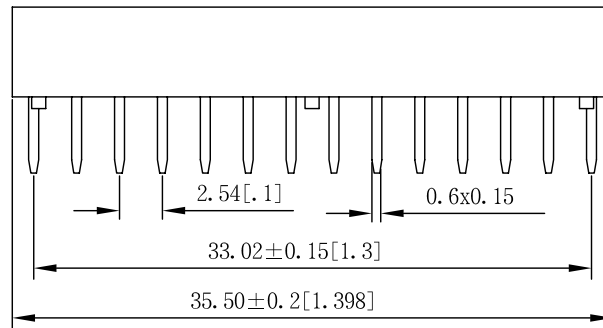

IS P B-26 V X 2 XX-01G-XX

P: PBT
Color
Pitch 2.54
Straight Type
Terminal Type
Row of Pin
Number of Contact

Plastic High 63:6.35
G: Gold Plated
T: Tin Plated
H: Duplex Plated
Contact Plating
01 Normal
03 3u"
: :
: :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm METRIC .X = ±0.38 .XX = ±0.25	DRAW: CHUBBY	DATE: 12/07/01	TITLE: 2.54 28P IC Socket Dual Row
	CHECK: KEVIN	APPROVE: TONY	MODEL CODE: ISPB-26VY228-01G-63

NO	DESCRIPTION	QTY
----	-------------	-----